




LIGHT CURTAIN

F-RASTER



900mm-2500mm light curtain

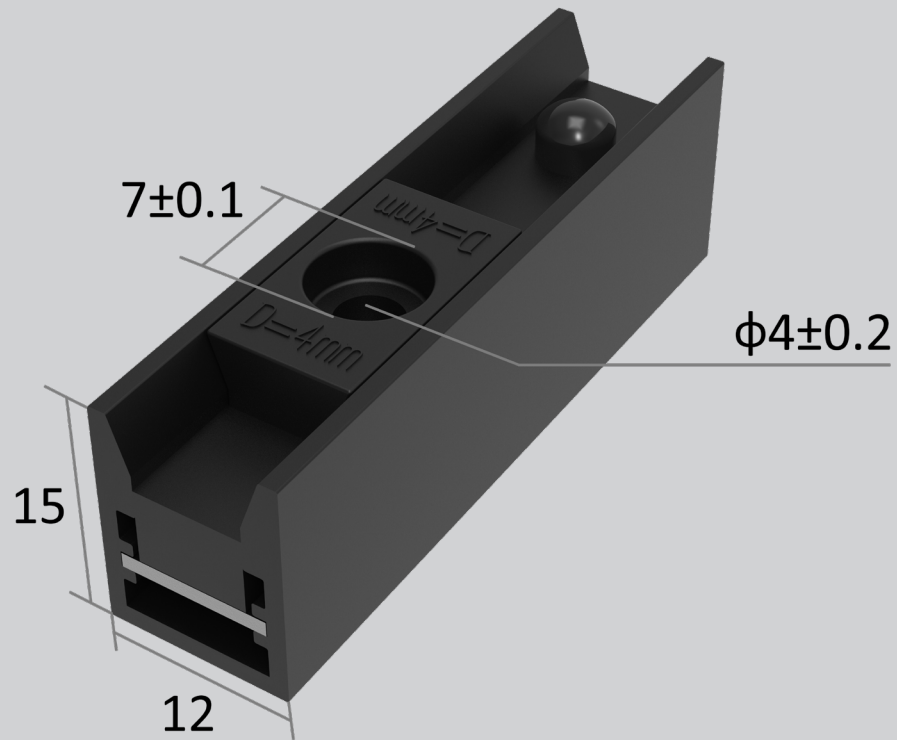

COMPACT DESIGN FOR EASIER INSTALLATION

Cross section only 12mm×15mm, ideal for scenarios with limited installation space.

Direct integration into the door edge (SB and DB types). It features a compact design, allowing it to be embedded in the door edge for installation, and is commonly used in equipment such as industrial high-speed doors. The max. operating speed can reach 1.6 m/s.

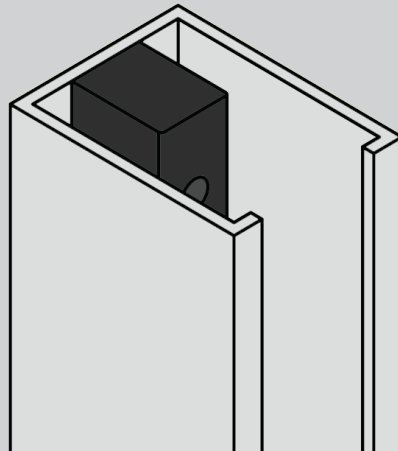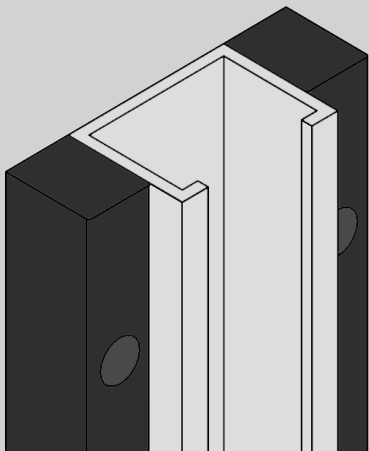




WATERPROOF AND STRONG ANTI-INTERFERENCE CAPABILITY

Electrical synchronization for increased light and strobe immunity.

Waterproof housing (IP67) and very high light reserve make the light curtain insensitive to dust, dirt and water. It can operate stably in harsh environments.

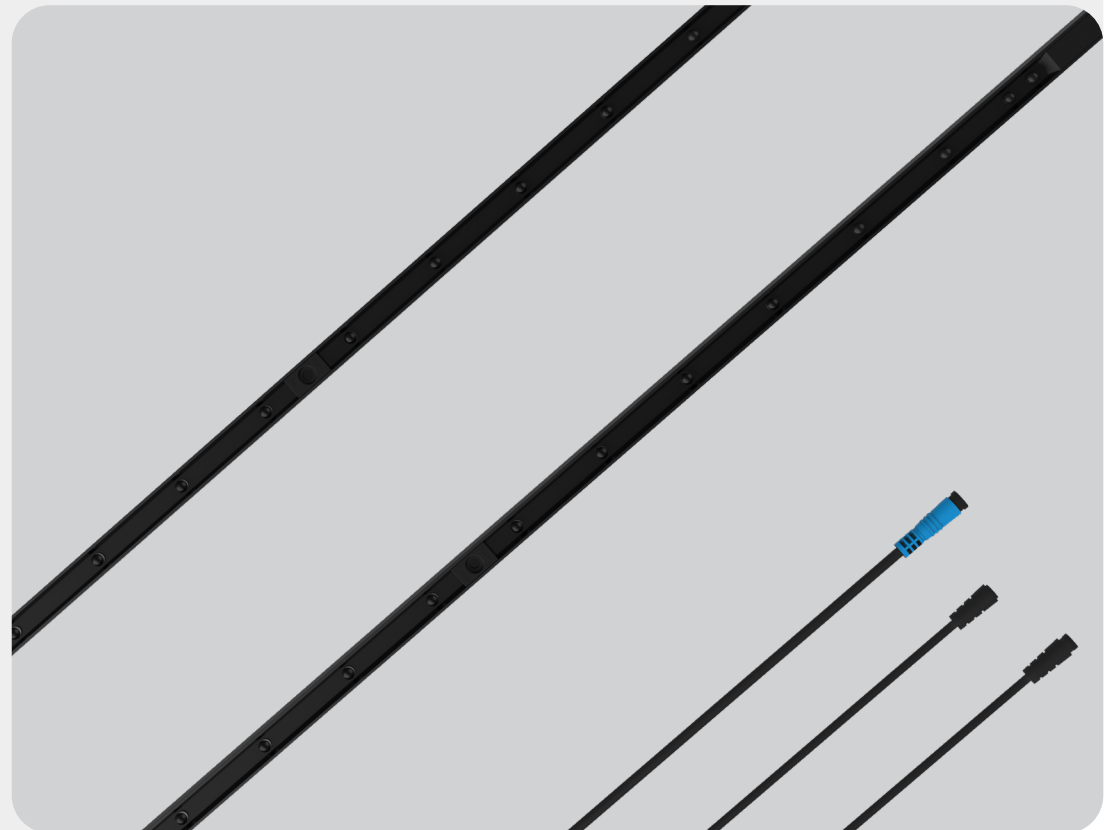

SAFETY CERTIFICATION DIRECTIVE


- EN 61326
- EN 61000-6-3
- EN ISO 13849-1:2008
- EN 12978:2003+A1:2009
- IEC 61496-2:1997
- EN 12445:2000 Chap.7
- EN 12453:2000 Chap.5



BOTTOM PHOTOEYE ARRANGEMENT ENSURES SAFETY


Criss-cross beams, the emitter and receiver edges form a grid of infrared beams. When the infrared beams are interrupted, the output sends a signal to the connected door controller.



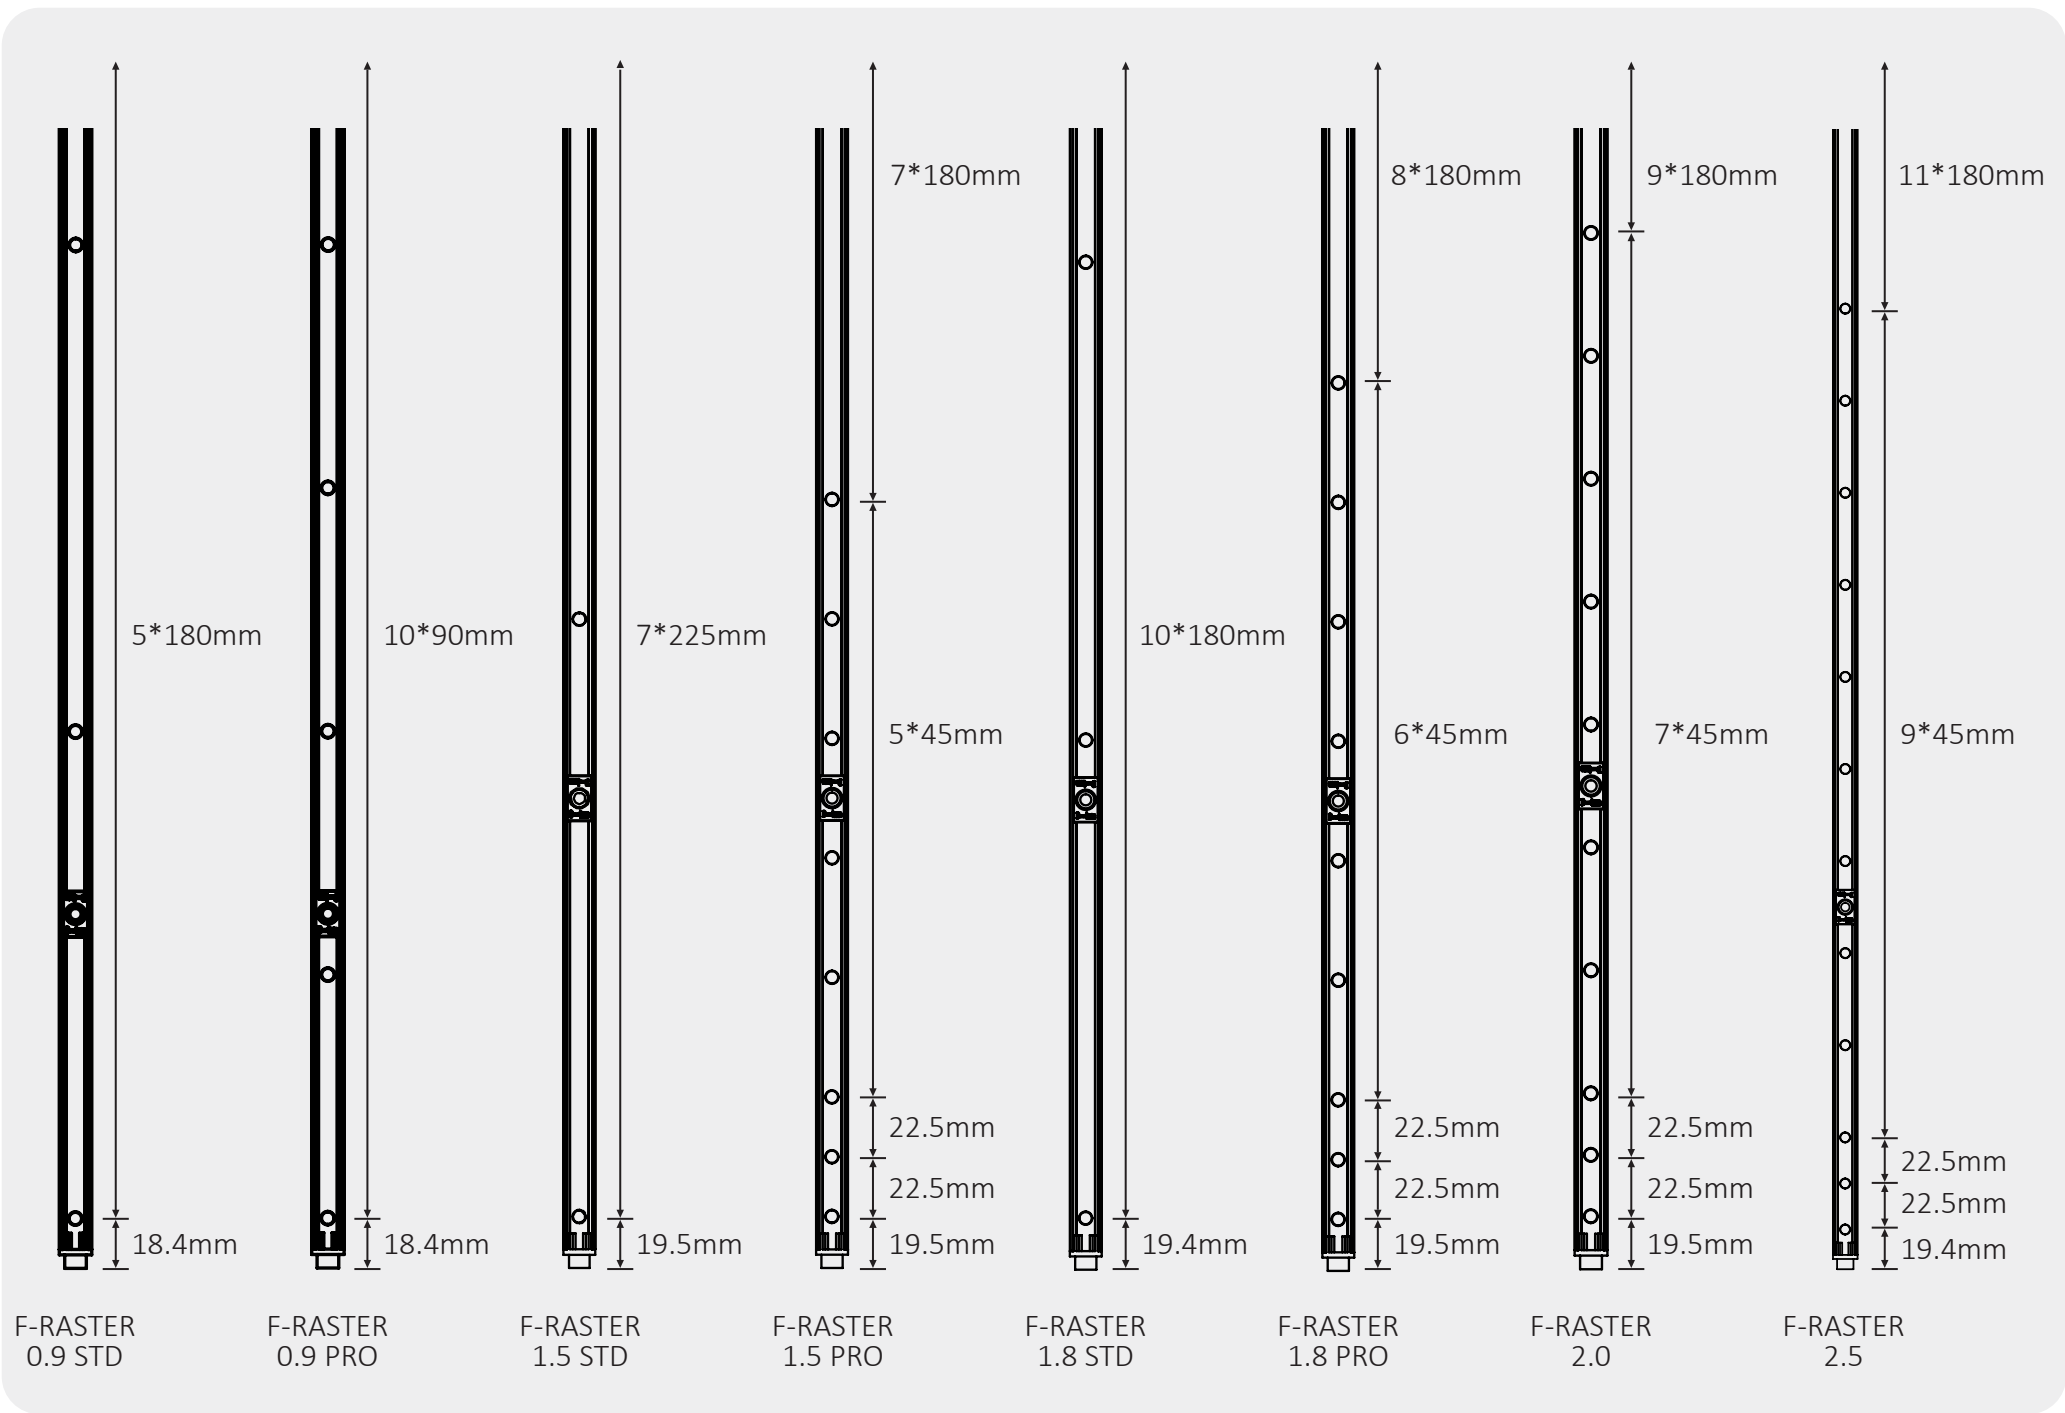


APPLICATION


Sectional industrial door

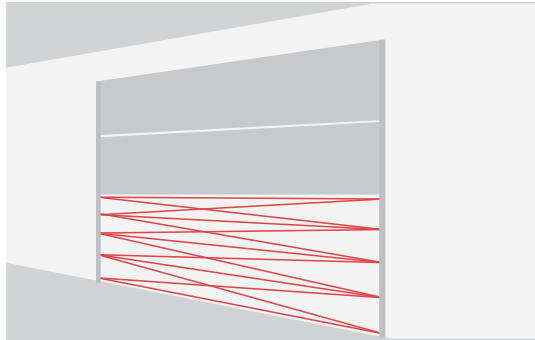


Rolling shutter door

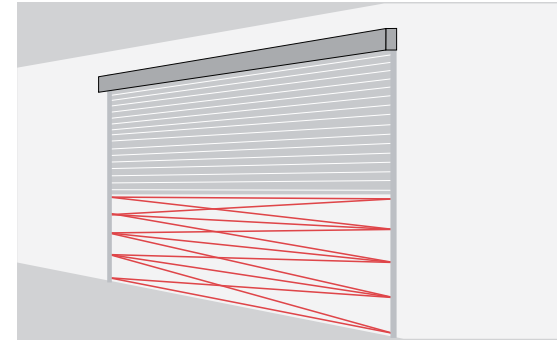


High-speed PVC rolling door

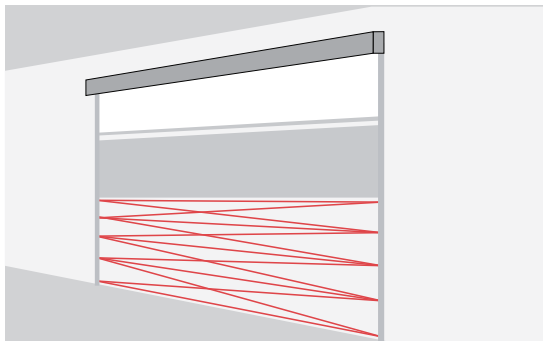


High-speed spiral door

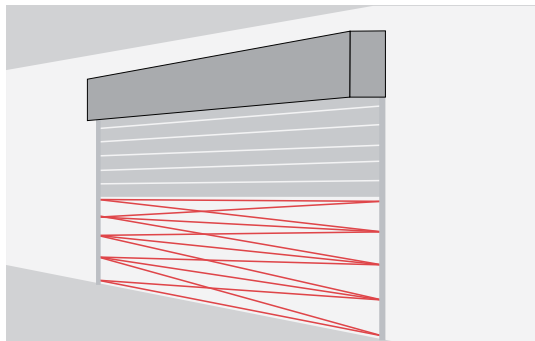


Industrial sliding door

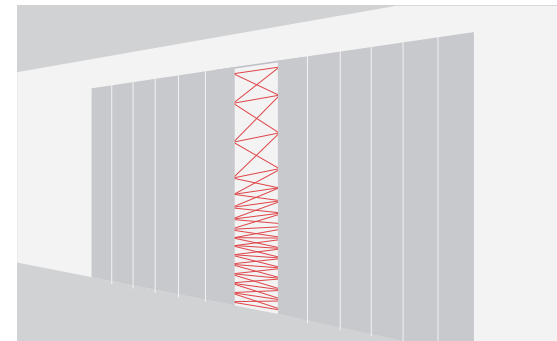


Swing gate

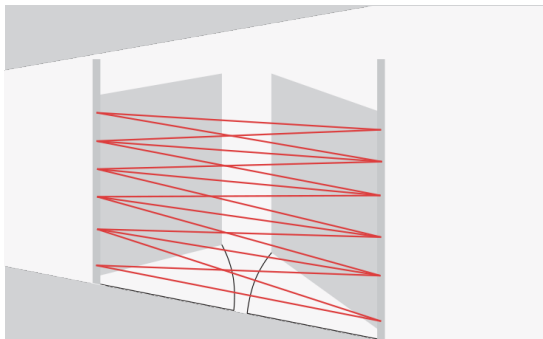

Sliding gate

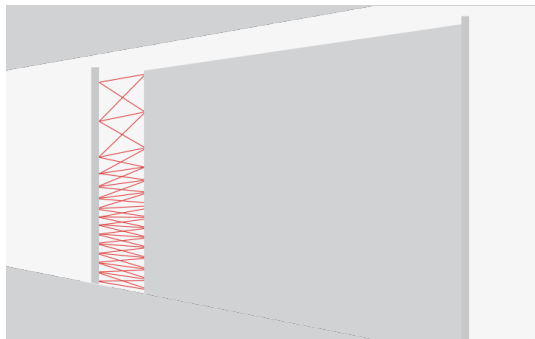

Revolving door

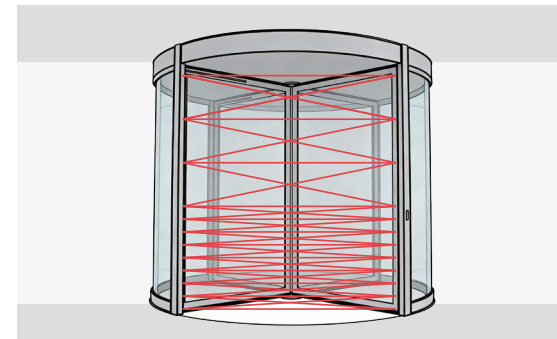

TECHNICAL DATA

OPTICAL	F-RASTER 0.9 STD	F-RASTER 0.9 PRO	F-RASTER 1.5 STD	F-RASTER 1.5 PRO	F-RASTER 1.8 STD	F-RASTER 1.8 PRO	F-RASTER 2.0	F-RASTER 2.5
Operating range	1 ... 10 m	1 ... 10 m	1 ... 10 m	1 ... 10 m	1 ... 10 m	1 ... 10 m	1 ... 10 m	1 ... 10 m
Number of elements	6	11	8	16	11	18	20	24
Max. protection height	918.5 mm	918.5 mm	1594.5 mm	1594.5 mm	1819.5 mm	1819.5 mm	2044.5 mm	2494.5 mm
Installation height	1034mm	1034mm	1705mm	1705mm	1935mm	1930mm	2155mm	2605mm
Aperture angle at 3m	±10° and Rx: ±20°	±10° and Rx: ±20°	±10° and Rx: ±20°	±10° and Rx: ±20°	±10° and Rx: ±20°	±10° and Rx: ±20°	±10° and Rx: ±20°	±10° and Rx: ±20°
Max. ambient light	100,000 Lux	100,000 Lux	100,000 Lux	100,000 Lux	100,000 Lux	100,000 Lux	100,000 Lux	100,000 Lux

MECHANICAL

Cross section	12 mm × 15 mm
Housing material	Aluminum alloy anodizing
Enclosure rating	IP67
Temperature range	-40 °C ... +60 °C

CONNECTION CABLE AND ELECTRICAL CONNECTION

Synchronization cable

Length	10 m
Diameter	Ø 3.5 mm
Material	PVC, black
Plug color	Black
Wires	AWG26
• brown	USP
• blue	GND (0 V)
• black	Communication
• white	Test signal

Connection cable

Cable length	5 m
Diameter	Ø 4.2 mm
Material	PVC, black
Plug color	Blue
Wires	AWG26
• brown	USP
• blue	GND (0 V)
• black	Output 1 (PNP/NPN)
• white	Test input
• gray	Selectable output logic
• green	Output 2 (FSS)

ELECTRICAL

Supply voltage USP	10 ... 30 VDC
Current consumption at 24 VDC	30 mA
Output	PNP/NPN (push-pull) and FSS
Output load	100 mA, 100 nF
Typ. response time with 24 elements	90 ms
Max. door speed	1.6 m/s
Status LED Rx:	
Object detected	Red
No object detected	Green
Transmitter connection abnormality	Yellow flash
Status LED Tx:	
Synchronization line fault	Yellow
Synchronization line normal	Green



LIGHT CURTAIN SYNCHRONIZATION CABLE

5m

10m

OPTIONAL ACCESSORIES



SIGNAL CONVERTER F-RASTER-S

Box dimensions: 90*50*42mm

Internal dimensions: 85*43*33mm

Waterproof grade: IP68

Screw material: 304 stainless steel screw

Input voltage: DC 10-30V

Box material: PC

Flame retardant grade: V-1

Sealing part: silicone ring



POWER CONVERTER F-RASTER-110-220V

Box dimensions: 120*70*48mm

Internal dimensions: 114*64*38mm

Waterproof grade: IP68

Maximum output current: 400mA

Screw material: 304 stainless steel screw

Input voltage: 100-265V

Output voltage: 12V

Box material: PC

Flame retardant grade: V-1

Sealing part: silicone ring



POWER CONVERTER F-RASTER-110V

Box dimensions: 120*70*48mm

Internal dimensions: 114*64*38mm

Waterproof grade: IP68

Maximum output current: 150mA

Screw material: 304 stainless steel screw

Input voltage: 90-130V

Output voltage: 12V

Box material: PC

Flame retardant grade: V-1

Sealing part: silicone ring



POWER CONVERTER F-RASTER-220V

Box dimensions: 120*70*48mm

Internal dimensions: 114*64*38mm

Waterproof grade: IP68

Maximum output current: 150mA

Screw material: 304 stainless steel screw

Input voltage: 180-260V

Output voltage: 12V


Box material: PC

Flame retardant grade: V-1

Sealing part: silicone ring


PACKAGING

Sample

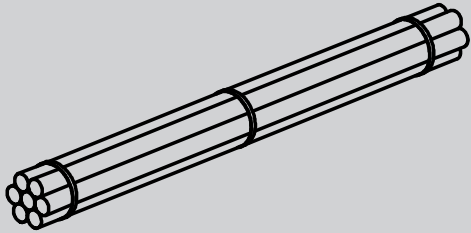

- For quantities of < 12 pieces, use straps for packaging.


LCL

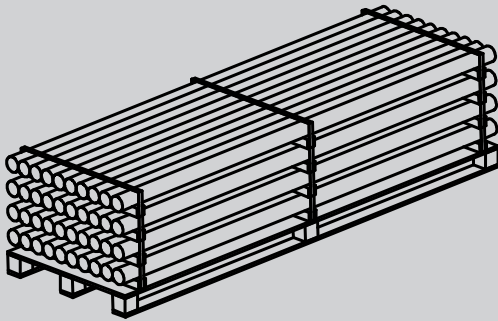

- For quantities $\geq$ multiples of 12 pieces, use pallets for packaging.
- 12 pieces per layer, with each layer separated by wooden battens, maximum 5 layers.

(For example: The order quantity is 84 pieces, which can be split into bundle of 48 pieces plus one bundle of 36 pieces)

FCL

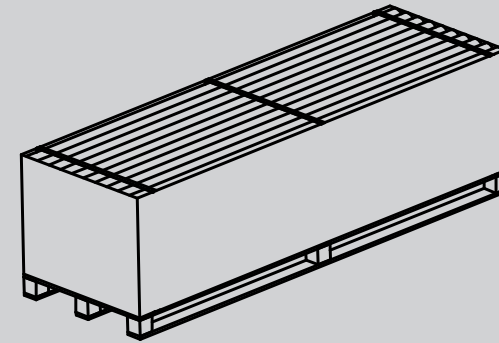

- 84 pieces per wooden box, 7 layers in total
- Pallet dimensions: 1040(W) x 1070(H)mm
- Wooden blocks: 1035(L) x 50(W) x 50(H)mm

20GP CONTAINER

2000mm/2500mm light curtain:
8 boxes, 672 pieces in total

40GP CONTAINER

2000mm/2500mm light curtain:
16 boxes, 1344 pieces in total

* Please contact the sales for details on the exact quantity available